




60 Cohoes Ave. Green Island, NY 12183 • www.gemlockgrooved.com • Ph: (518) 270-2159 • Fax: (518) 270-8384

FLANGE ADAPTERS

STYLE F190



- Conforms to Class ANSI 125 lb. flange
- Available with an external threaded or grooved end
- Every lot is metallurgically tested for compliance
- Available with hot dipped galvanized coating
- Rated for 300 psi

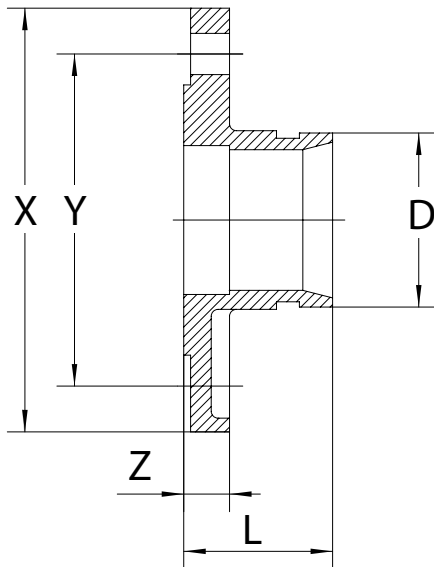

Nominal Size (In.)	Pipe OD D (In.)	Working Pressure (psi)	L (In.)	X (In.)	Y (In.)	Z (In.)	Bolt Size (In.) No. - Size
2	2.375	300	2.56	5.98	4.74	0.63	4-5/8
2-1/2	2.875	300	2.56	7.00	5.69	0.69	4-5/8
3	3.500	300	2.56	7.48	6.00	0.75	4-5/8
4	4.500	300	2.76	9.02	7.50	0.96	8-5/8
5	5.562	300	2.76	10.00	8.50	0.96	8-3/4
6	6.625	300	2.76	10.98	9.50	1.10	8-3/4
8	8.625	300	3.23	13.50	11.75	1.11	8-3/4
10	10.750	300	3.35	15.98	14.25	1.18	12-7/8
12	12.750	300	3.54	19.01	17.00	1.26	12-7/8

PROJECT	APPROVAL STAMP
PROJECT:	☐ APPROVED
ADDRESS:	☐ APPROVED AS NOTED
ENGINEER:	☐ NOT APPROVED
SUBMITTAL DATA:	REMARKS:
NOTES 1:	
NOTES 2:	